

PCI PECITAPE[®] SILENT


Self-adhesive insulation tape to prevent sound transmission

Areas of application

- For indoor use.
- On concrete floors, floating screeds or screeds on isolating layer, timber floors and chipboard floors, old ceramic and natural stone floors
- For the transition area floor/wall to prevent mortar bridges when applying tile adhesives and/or free flowing levelling compounds Mastertop 528, as well as the self-levelling isolating compound PCI Nanosilent to all suitable substrates.
- As insulation tape for screed installation.
- To prevent three-side adhesion of elastic edge joints.
- Especially for renovation works.

Features and benefits

- Non rotting polyethylene foamed material.
- Self-adhesive, therefore simple and secure working.
- High bond to clean substrates.
- Prevents sound transmission due to “placeholder function”, bedding and leveling mortars cannot overflow into the edge joint.

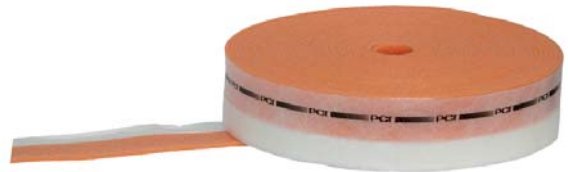

PCI PECITAPE[®] SILENT

Technical data

Material

Material base	fleece-lined polyethylene foamed material, self-adhesive on one side with cover foil on the adhesive side
Colour	orange
Packaging	box with 4 rolls at 25 m each
Shelf life	approx. 12 months
Storage	cool and dry

Preparation of substrate

Clean the relevant area and remove any residues in the transition area wall/floor. Sweep off with a fine broom.

Prime substrate with a suitable PCI primer depending on the material base and in accordance with the respective product data sheet. Allow primer to dry.

Application procedure

- Take PCI Pectape Silent out of the box and unroll to the required length.
- Remove protective foil and press PCI Pectape Silent to the floor applying positive pressure but without stretching the tape. Ensure accurate application of the tape in corners.
- At inside and outside corners the insulation tape is to be applied butt-joint and covered with adhesive tape (e.g. Tesa Krepp).
- Tile laying and/or the installation of free-flowing levelling and isolating compounds or screeds can continue immediately.



PCI Pectape Silent can be rapidly and securely applied

Please note

- The substrate must be clean, sound and able to bear weight.
- Install PCI Pectape Silent without stretching it.
- Once installed the tape cannot be removed any more from the
- Substrate without being damaged.

For further information refer to the Material Safety Data Sheet.

02/2009 BASF_CC-UAE

Whilst any information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

As all BASF technical datasheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue.

BASF Construction Chemicals UAE LLC

P.O. Box 37127, Dubai, UAE

Tel: +971 4 8090800

www.basf-cc.ae

Fax: +971 4 8851002

e-mail: marketingcc.mideast@basf.com



Certificate No.
963680



Certificate No.
945787



Certificate No.
772556