

MASTERFLEX[®] 900

Re-injectable hose waterstop system for construction and cold joints in concrete

Description

MASTERFLEX[®] 900 is a blue flexible PVC hose which comprises a solid core and lateral openings covered by neoprene strips, all banded by an open webbed nylon mesh.

Primary uses

MASTERFLEX[®] 900 is designed to replace waterbar for use in concrete structures which contain joints other than expansion joints and subject to hydrostatic pressure on one or both faces of the structure. Its use prevents passage of water through concrete joints in the following typical applications.

- Water reservoirs / tanks
- Canals
- Dams
- Sewage treatment plants
- Liquid storage vessels
- Any sub base concrete construction
- Water excluding or retaining structures

Advantages

- Eliminates costly design, welding and installation of waterbar.
- Water cannot penetrate treated joint and rebar, unlike traditional installation where water is in contact with the reinforcement up to the waterbar.
- The installed system assures a watertight structure.
- Fast easy installation procedures even to complicated design detail.
- Proven and predictable performance.
- Joints can be tested for watertightness before backfilling or membrane tanking operations.

- System enables retro-injection, to stop leaks caused subsequently by settlement or structural movement at the construction joint.
- Completely maintenance free.
- Possible to retro-fit when new construction is built against existing structures.

Packaging

Two boxes comprising the following:

Box 1

100 meters blue re-injectable hose

Box 2

- a) 20 meters green vent hose
- b) 20 meters transparent vent hose
- c) 2 meters shrink on sleeve
- d) 2 meters connecting nozzle
- e) 30 closure plugs
- f) 500 anchor clips

*Typical properties

MASTERFLEX[®] 900 re-injectable hose is a specially formulated PVC compound. The material is tough, flexible, resilient, chemically inert, is not affected by weathering, low temperatures, or constant immersion in water. It will withstand rough treatment during installation and is easy to install.

MASTERFLEX[®] 900 re-injectable hose is unaffected by alkalis, sewerage, most water solutions of organic chemicals, aliphatic hydrocarbons (fuel), mineral oils, acids and alcohols.

MASTERFLEX[®] 900

Outside diameter 19mm, longitudinal internal injection hole diameter 6mm, discharge openings diameter 3mm.

Installation within all types of concrete joints.

Installation

Preparatory work:

All MASTERFLEX[®] 900 re-injectable hoses should be protected from oil, dirt, concrete spatter and damage and should be left clean to receive concrete.

The surface where the MASTERFLEX[®] 900 re-injectable hose will be installed has to be smooth. The surface generated by an internal vibrator while compacting the concrete will usually be suitable.

Method:

The MASTERFLEX[®] 900 re-injectable hose consists of the injection hose itself and the vent ends. These are specially fabricated PVC hoses to withstand injection pressure, in green and transparent colours. The vent ends allow the fixing of injection equipment at a later stage and generally project 20 cms out of the concrete surface.

After pouring the concrete, only the vent ends are visible. The different colours make the identification of the start and end of the hose after concreting. The injection hose and vent ends must be encased in at least 5cm of concrete.

The MASTERFLEX[®] 900 re-injectable hose is installed in lengths up to a maximum length of 12m. For upto 600 mm wall thickness the MASTERFLEX[®] 900 hose should be installed at the centre of the wall thickness.

The hose is clamped into position with MASTERFLEX[®] 900 clips spaced about 200-250mm apart. The hose must not be fastened to the reinforcement bars in the wall.

It is essential that there is a direct contact between the hose and the concrete. If aggregate or debris lie on the concrete, these must be removed, to prevent floating of the hose in the freshly poured concrete.

Guidelines

Installation, injection, reinjection, and selection of materials should be entrusted to an experienced and certified MASTERFLEX[®] 900 applicator.

The injecting of the hose may be carried out at any time either before switching off the dewatering as a precautionary measure or afterwards if leaks are noticed. The hose may be injected with water under pressure to test the integrity of the joint.

Injection of the MASTERFLEX[®] 900 hose with MASTERFLEX[®] 801 or RHEOCEM permits reinjection. Use of any other resins will render the hose unusable.

Injection always starts at one end adopting the following procedure:

- Fill the hose with injection material by means of an injection pump until it flows out at the other end.
- Plug that end with the end cap.
- Pressurise the MASTERFLEX[®] 900 hose.

Continue to inject until the moment that no material flows into the joint (there is no or only slight pressure drop at the gauge); resin is seen


MASTERFLEX[®] 900

flowing out of the joint or a predetermined quantity has been injected. Sealing is achieved by moderate pressure and a longer injection time, as opposed to high pressure over a brief injection period.

- If required the same procedure may be adopted from the other end of the MASTERFLEX[®] 900 hose, this is to ensure even pressure distribution over the whole length.
- Within the gel time, pressurise the hose again briefly.

Note: Normally one injection is enough to completely seal the joint, however this depends on the quality of the concrete and/or the water pressure.

Components of the MASTERFLEX[®] 900 HOSE

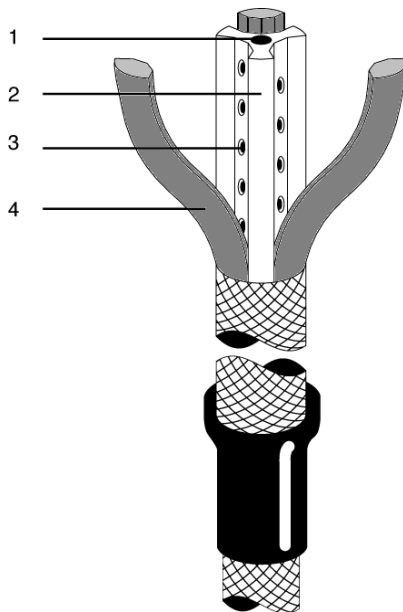

1. Injection diameter 6mm.
2. Solid hose core for resisting concrete pressure.
3. The lateral openings with a diameter of 3mm, each staggered by 1cm, ensure a uniform discharge of the injection material.
4. The three neoprene strips in the longitudinal grooves act as non return valves.

Note

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local BASF representative.

BASF reserves the right to have the true cause of any difficulty determined by accepted test methods.

Quality and care

All products originating from BASF's Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001, ISO 14001 and OHSAS 18001.

12/94 BASF_CC-UAE revised 05/2011

* Properties listed are based on laboratory controlled tests.

Whilst any information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

As all BASF technical datasheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue.